

6" SOUND ATTENUATED

Prime Assisted Solids Handling Pump

Our 6" sound attenuated pump operates at or below 70dBA for quiet, efficient running. As a solids handling jet pump, it's designed for high flows to 2,700 gpm and heads to 195feet. Our quick self-priming pump eliminates the need for a waste hose and the need to fill up the pump housing with water to obtain prime. It also prevents discharge of pumping effluent onto the ground. In addition, our Tier IV diesel engines reduce emissions.



Features

- John Deere 4045TF290-74 engine
- Fully automatic, dry priming to 28 feet
- High head to 195 feet
- Maximum flows to 2,700 gpm
- Solids handling to 3"
- Removeable drop-on sound enclosure, constructed of 18 gauge solid galvaneel shell and 1.5" thick, 8lb density mineral wool
- Lockable doors
- Emergency Engine Shutdown Button

Specification

- Operating noise: 70dBA measured at 7 meters at full speed
- Fuel tank capacity: 114 US Gallons
- Fuel consumption: 3.97 gph @ 2,000 rpm
- Maximum operating speed: 2,000 rpm
- Maximum operating temperature: 200 degrees F
- Maximum working pressure: 130 psi
- Maximum suction lift: 28 feet
- Impeller: 12" diameter

Engine Specifications

- Engine: John Deere 4045T, 72hp@ 2,000 rpm
- Type: 4-cylinder, in-line, 4-cycle, water cooled, direct-injected turbo-charged, Interim Tier IV diesel
- Displacement: 275 cubic inches
- Fuel Economy:**
 - + .397 lb/hp-hr @ 2000 rpm
 - + .395 lb/hp-hr @ 1800 rpm
 - + .397 lb/hp-hr @ 1600 rpm
- Maximum operating time:**
 - + 28 hours @ 2,000 rpm
 - + 36 hours @ 1,800 rpm
 - + 49 hours @ 1,600 rpm

Vacuum Pump Specifications

- Vacuum pump: Dry, rotary claw, air cooled, oil less, direct drive (5.4 hp)
- Casing: Class 30 cast iron
- Maximum operating temperature: 200 degrees F
- Maximum working pressure: 15 psi
- Maximum suction lift: 28 feet
- Air handling capacity: 97 SCFM

Construction


- Pump casing: Heavy duty Class 30 cast iron
- Impeller: Dynamically balanced, non-clogging, enclosed, CD4MCu, with rear-equalizing vanes to reduce axial loading and prolong seal and bearing life

- Mechanical Seal: 2.5" run-dry, grease lubricated with Tungsten Carbide rotating and Silicon Carbide stationary seal faces. Single inside mounted, non-pusher type with self-adjusting elastomeric bellows. All other components are 304 stainless steel and viton.

- Head: Back pull out design, heavy-duty class 30 cast iron with tapered bore design
- Bearing and Frame: 30 cast iron, heavy duty grease lubricated
- Shaft: 17-4 pH stainless steel fitted with renewable 416 stainless steel sleeve

**Photos are representational; actual products vary. Additional product plans and specifications may vary from those shown and are subject to in-stock availability.*

6" Sound Attenuated Pump Performance Curve

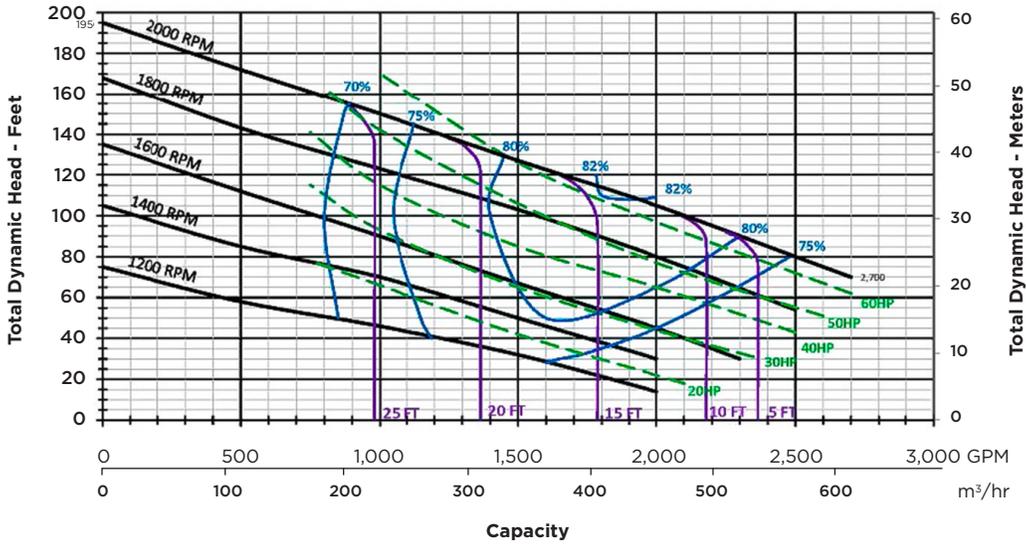

*Some details not shown in all views. Overall dimensions are normal.

*Photos are representational; actual products vary. Additional product plans and specifications may vary from those shown and are subject to in-stock availability.